

Registration No :

--	--	--	--	--	--	--	--	--	--

Total Number of Pages : 04

B.Tech
PEE4I102

4th Semester Regular / Back Examination 2017-18

CONTROL SYSTEM ENGINEERING - I

BRANCH : ELECTRICAL

Time : 3 Hours

Max Marks : 100

Q.CODE : C677

Answer Part-A which is compulsory and any four from Part-B.

The figures in the right hand margin indicate marks.


Answer all parts of a question at a place.

Part – A (Answer all the questions)

Q1 Answer the following questions :

(2 x 10)

a) The transfer function $\frac{C(s)}{R(s)}$ of the block diagram shown in figure is _____.

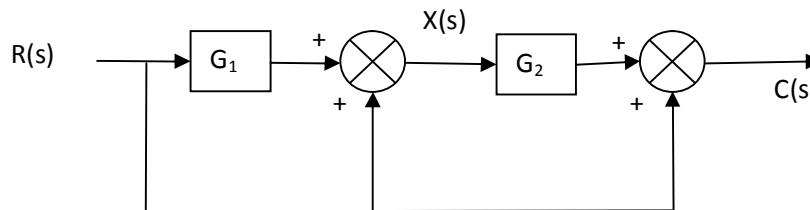

b) Time domain information is not considered in block diagram representation of dynamic systems because(Choose the right option)

- a) Output cannot be directly obtained by multiplying the time-domain input with the impulse response function
- b) It is difficult to get physical insight using time-domain response
- c) It is difficult to give time-domain input
- d) None of the above

c) If open-loop poles and zeros are on the right-hand plane, then (Choose the right option)

- a) The system is unstable for all values of the gain
- b) The system is stable for all values of the gain
- c) Nothing can be said about the stability based on this information
- d) The system is stable for some values of gain depending on the input excitation

d) Controllability of a system means (Choose the right option)

- a) The input is related to all the state-variables
- b) The input is related to most dominant state-variables
- c) The input is related to the least dominant state-variables
- d) None of the above

e) The open loop transfer function of a unity feedback system is given by

$$G(s) = \frac{20(0.1s + 1)}{s(0.2s + 1)(0.02s + 1)}$$

The corner frequencies for the system are _____.

f) Bode magnitude and phase plots are plotted on a semi-log paper because(Choose the right option)

- a) Magnitude and phase are plotted on a frequency scale that contains very small to very large frequencies, thus, requiring a log scale
- b) Magnitude is expressed in decibels, and thus, a linear scale is sufficient along the y-axis
- c) Both a) and b)
- d) The characteristics features of magnitude and phase are better displayed on a semi-log paper

- g) If there are n number of poles and m number of zeroes of a transfer function, _____ number of branches of the root locus will move to ∞ and along which _____ angles.
- h) A network comprises of 2 inductors, 1 capacitors and 1 resistors. The current across different inductors are linearly independent and voltage across different capacitors is linearly independent as well. _____no. of states are necessary to describe the network in state variable form.
- i) The biggest disadvantage of state-space methods is (Choose the right option)
 - a) They consume too much of computer time
 - b) Physical insight is lost after modeling a system in state space
 - c) The analysis is done in time domain
 - d) They cannot be used to solve a general class of problems in control
- j) The damped natural frequency for a closed loop system represented by differential equation is _____.

$$\frac{d^2c(t)}{dt^2} + 8\frac{dc(t)}{dt} = 64[r(t) - c(t)]$$


Where c(t) is the displacement of the output shaft and r(t) is the displacement of input shaft.

Q2 Answer the following questions: Short answer type: (2 x 10)

- a) Define transfer function. What are the assumptions made for the initial conditions?
- b) Write down Mason's gain formula for determining the transfer function of a signal flow graph, explaining the meaning of each term.
- c) What do you understand by 'Sensitivity to parameter variations'? Is it more or less in closed loop systems in comparison to open loop systems?
- d) Why is a system with poles on the RHS of the s-plane an unstable system?
- e) How can you ascertain the status/ type of stability of a system from its root locus?
- f) What is principle of argument?
- g) What effect does the increase in gain have on the transient and steady state behavior of a system?
- h) If you add a pole at the origin to a system, how its polar plot be modified with respect to the one before addition of the pole?
- i) Name the standard test signals and draw the input – output relationships for each.
- j) Write the transfer function for a PI and PID controller.


Part – B (Answer any four questions)

- Q3 a) Evaluate the transfer function(C/R) by using block reduction techniques for a system whose block diagram representation as shown in Fig. (10)**

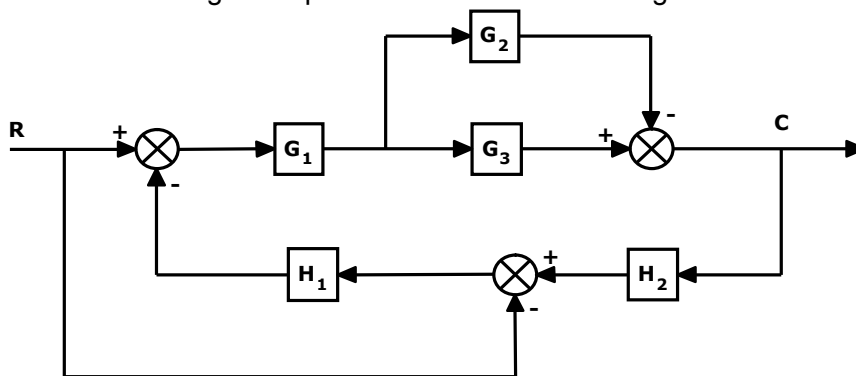


Determine the transfer function(C/R) of the system shown in Fig,using Mason's Gain Formula.

- b) Find out the transfer function $X_o(s)/X_i(s)$. (5)

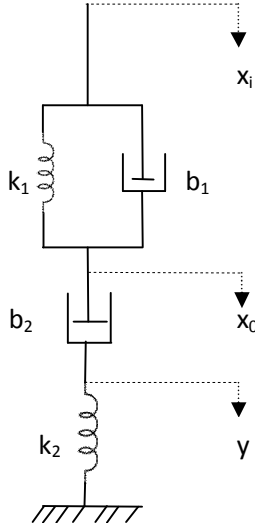

- Q4 a) (10)

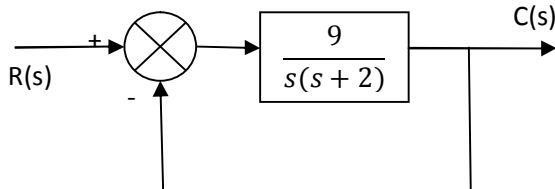

Determine the natural frequency of oscillation, damping factor, peak overshoot, rise time settling time and steady state error to unit step input for the above system.

- b) A control system having a transfer function is $C(S) / R (s) = 10/(S^2+2s+10)$. Determine the expression for time response,if the system is subject to a unit step input. (5)

- Q5 a) Consider a control system with state model (10)

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \end{bmatrix} = \begin{bmatrix} 0 & 1 \\ -6 & -5 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \end{bmatrix} + \begin{bmatrix} 0 \\ 1 \end{bmatrix} [u]; \quad \begin{bmatrix} x_1(0) \\ x_2(0) \end{bmatrix} = \begin{bmatrix} 0 \\ 1 \end{bmatrix}, u = \text{unit step}$$

Compute the state transition matrix and therefrom find the state response, i.e., $x(t)$ for $t > 0$.

- b) Check the observability of the following system (5)

$$\begin{bmatrix} \dot{x}_1 \\ \dot{x}_2 \\ \dot{x}_3 \end{bmatrix} = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ -6 & -11 & -6 \end{bmatrix} \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix} + \begin{bmatrix} 0 \\ 0 \\ 1 \end{bmatrix} [u]$$

$$y = [4 \quad 5 \quad 1] \begin{bmatrix} x_1 \\ x_2 \\ x_3 \end{bmatrix}$$

- Q6 a) For a unity feedback control system the open loop transfer function is (10)

$$G(s) = \frac{100(s+5)}{s(s^2+2s)(s+7)}$$

- (i) Find K_p, K_v, K_a
 (ii) Find steady state error (e_{ss}) due to an input described by


$$r(t) = 1 + 7t + \frac{t^2}{2}$$

- b) A unity feedback system is characterized by the open loop transfer function (5)

$$G(s) = \frac{K(s+13)}{s(s+3)(s+7)}$$

Using Routh's criteria, calculate the range of values of K for the system to be stable?

- Q7 a)** Draw the Bode magnitude and phase plot of the following system and determine gain margin, phase margin, and absolute stability **(10)**

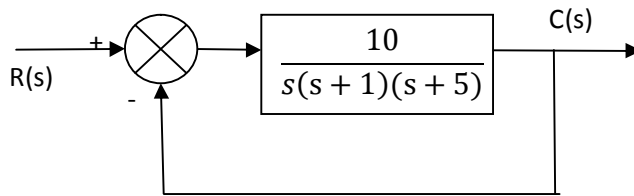

- b)** Define the terms Gain Margin, Phase Margin, Gain crossover frequency and Phase crossover frequency. Why is Gain Margin determined at Phase crossover frequency and Phase Margin at Gain crossover frequency? **(5)**

- Q8 a)** Plot the root loci for the unity feedback system with **(10)**

$$G(s) = \frac{K}{(s+2)(s^2+2s+4)}$$

(i) Determine the centroid and the breakaway points.

(ii) Find the frequency at which the root locus branches cross the imaginary axis.

- b)** What do you mean by State Transition Matrix? Discuss one method of determining it. **(5)**

- Q9 a)** An open-loop transfer function of a unity feedback system is given by **(10)**

$$G(s)H(s) = \frac{K}{s(s+2)(s+4)}$$

(i) For $K = 1$, apply the Nyquist stability criterion to determine its stability

(ii) Determine the gain margin and the phase margin.

- b)** Write short notes on PID Controller. **(5)**